SR 400
Intruder Alarm Siren

EN 50131
GRADE 3 Class IV

Description


SR 400 is an outdoor piezo siren. The siren has blue flash indication and selectable loudness levels. SR 400 is equipped with inner plastic casing and bidirectional tamper for higher protection.
The siren comes with built in NiMH battery (9V / 1100mAh).
SR 400 has a flat plastic cover, which is especially suitable for company sticker or logo.



Technical Specifications

Loudness . . . . . 85 dB/1m (low level); 105 dB/1m (high level)
Power supply 9-15VDC
Current consumption:
- Standby mode 18mA
- Alarm mode 270mA

Battery . . . . . 9V/ 1100mAh, built-in, NiMH
Frequency . . . . . 2.8 - 3.1 kHz
Loudspeaker type . . . . . piezo
Protection IK08; IP45
Operating temperature . . . . . -30°C / +70°C
Housing . . . . . ABS plastic box with inner plastic cover
Dimensions . . . . . 309 x 197 x 39mm
Weight 0.78kg

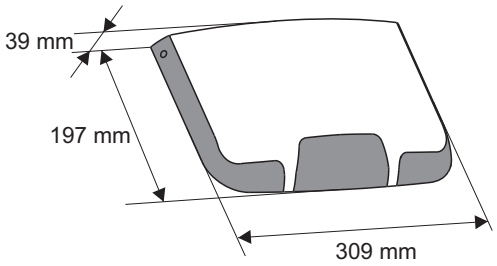

CE

Functional Specifications

Inputs . . . . . 1 ALARM and 1 FIRE
Outputs . . . . . 1, for technical TROUBLE indication
Connection type . . . . . 2 or 3 wire connection
Inner cover for electronics protection . . plastic
Tamper switch . . . . . bi-directional
LED indication . . . . . status, blue flash

Packing Information

- **Packing box** - 1 unit SR 400, dimensions 312 x 200 x 53 mm

Compatible Product Range

- **ECLIPSE 8/16/32/99** - Control panels ECLIPSE Series
- **BRAVO MOUT** - Expanding module for wired sirens
- **Third party alarm control panels**

Contact Information

Teletek Electronics JSC
14A Srebarna Str, 1407 Sofia, Bulgaria
Tel.:+359 2 9694 800
Fax: +359 2 9625 213
info@teletek-electronics.bg
www.teletek-electronics.com