MARINE


Your Safety, Our Technology

YBN-R/6M

Marine Approved Conventional Mounting Base

Features

- Integral remote indicator output
- Low Profile, only 8 mm
- Rugged design
- Electronics free
- Quick connections via square cable clamps
- Accepts 2.5 mm² cables
- Bayonet slot, low insertion force for detectors
- Approved to MED by GL

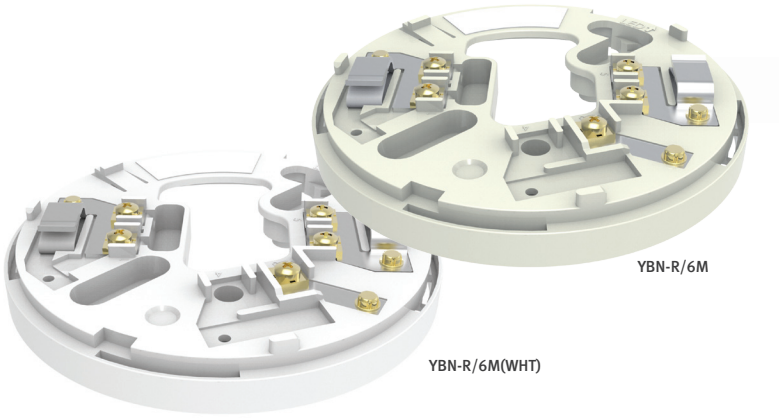

Description

Model YBN-R/6M is a Conventional Detector Mounting Base approved for marine applications by GL (Germanischer Lloyd) and is associated with the CDX Range of Marine Approved Detectors.

It is supplied with square cable clamps for secure and reliable cable termination but the base does not provide line continuity during detector removal, therefore if Call Points are being used then these should be wired onto the zone first. The integrated third terminal provides remote indicator output.

Specification (add details below)	
Maximum Humidity	95%RH - Non Condensing (at 40°C)
Colour / Material	Ivory or White / ABS
Diameter (mm) / Height (mm)	100/8
Fixing Centres (mm)	48 ~ 74
Maximum Wire Thickness	2.5 mm² Cables

Ordering Codes

Product	Part Number
Marine Approved Conventional Mounting Base	YBN-R/6M
Marine Approved Conventional Mounting Base (White)	YBN-R/6M WHT

HOCHIKI

ISS2JAN19

For further information visit www.hochikieurope.com/marine

Hochiki Europe (UK) Ltd. Reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. To be a complete and up-to-date description.